

# Ultra-Tred ArmorCote No. 440



**WEARWELL®**

You're in good company™

## Performance: **GOOD**

**Ultra-Tred ArmorCote** combines the comfort of a soft, PVC sponge with a more chemically resistant surface. A tremendously versatile, yet affordable mat, its **double** thick **urethane coating** offers more abrasion resistance than comparable sponge products. Ideal for laboratories and medium traffic areas.

### Specs

**Uses** All dry work areas

**Compound** Blown vinyl sponge

**Compression** .178 inches @ 35 psi per ASTM D575

**Coefficient of Friction** 1.03 Dry per ASTM F1677

**Tabor Abrasion** 2% lost @ 1,000 cycles per Fed Std. 193



**Flammability** "A" Rating per MVSS 302

**Edges** Rounded on stock sizes. Safety beveled on cut lengths

**Thickness** 3/8"

**Warranty** 1 year, conditional

**Color** Black/Yellow (BYL)

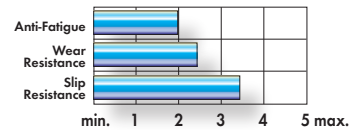

### Stock Sizes

Part Number	Size
440.38x2x3BYL	2' x 3'
440.38x3x5BYL	3' x 5'
440.38x3x12BYL	3' x 12'
440.38x2x60BYL	2' x 60'
440.38x3x60BYL	3' x 60'
440.38x4x60BYL	4' x 60'

### Non-Stock Sizes

Part Number	Size
440.38x2CutBYL	2' Cut
440.38x3CutBYL	3' Cut
440.38x4CutBYL	4' Cut

**Cut Sizes up to 60' in length**