


Kushion Walk No. 475

Performance: BETTER

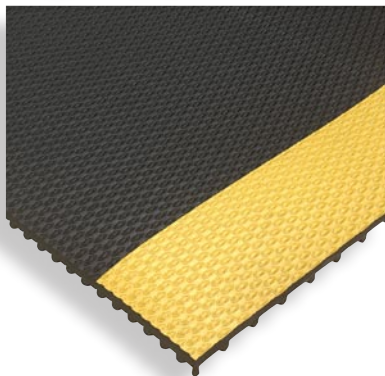

Kushion Walk is a super tough, abrasion resistant runner that combines modest comfort with solid construction. Its durable, textured surface guards against slip and fall injuries, while a knobbed bottom and **optional drainage slots** permit run-off and aeration. Kushion Walk's tough construction is ideal for grates and catwalks.

Specs

Uses Mostly dry areas

Compound 100% Vinyl

Durometer 75 per ASTM D2240

Coefficient of Friction 1.03 Dry .81 Wet per ASTM F1677

Tabor Abrasion < 1% lost @ 1,000 cycles per Fed Std. 193


Flammability "A" Rating per MVSS 302

Edging Molded safety bevells

Thickness 3/8"

Warranty 1 year, conditional

Colors Black (BK), Black/Yellow (BYL)



Stock Sizes

Part Number	Size
475.38x3x5	3' x 5'
475.38x2x60	2' x 60'
475.38x3x60	3' x 60'

Black is in stock


Non-Stock Sizes

Part Number	Size
475.38x2Cut	2' Cut
475.38x3Cut	3' Cut

Cut Sizes up to 60' in length

When ordering specify :
Slotted (SLT) or Unslotted (UNS)

Specify Color:
Black (BK), Black/Yellow (BYL)
when ordering.



Abrasive Coated Kushion Walk No. 480

Performance: BETTER



Abrasive Coated Kushion Walk is an excellent option for slip resistance and comfort in hazardous industrial areas. An incredibly durable anti-fatigue runner, its improved GritWorks!® surface provides superb traction. Rugged enough for use on gratings, it is available with or without drainage slots.

Specs

Uses Wet, slippery areas

Compound 100% Vinyl with gritted surface

Durometer 75 per ASTM D2240

Coefficient of Friction 1.10 Dry 1.10 Wet per ASTM F1677

Tabor Abrasion < 1% lost @ 1,000 cycles per Fed Std. 193


Flammability "A" Rating per MVSS 302

Edging Molded safety bevells

Thickness 3/8"

Warranty 1 year, conditional

Color Black (BK)



Stock Sizes

Part Number	Size
480.38x2x60BK	2' x 60'
480.38x3x60BK	3' x 60'

Non-Stock Sizes

Part Number	Size
480.38x2CutBK	2' Cut
480.38x3CutBK	3' Cut

Cut Sizes up to 60' in length

When ordering specify :
Slotted (SLT) or Unslotted (UNS)

